

# PM50T

## IP65

### MORE IMPORTANT THAN POWER : PRESENCE

The performance and the dynamics of the High-definition sound projector PM50T are going to surprise you. Restoring the music and the voice to the perfection and guaranteeing a spatial effect seizing thanks to the technology ATAO Audio System<sup>®</sup>, this loudspeaker 2 ways is ideal for all the sound system of public places, in particular in case of problems of acoustics.

Easily directional thanks to its system of binding, it is endowed with components and with a ABS hull which resist the humidity and the thermal shocks, so this loudspeaker can be easily outdoor settled. The connections are made by terminal blocks. Thanks to its transformer, it works on-line 100 volts (50Watts). Optional thermal fuse

**The patented process Atao Audio System<sup>®</sup> allows a reproduction and a broadcasting of true sound surprising close to direct listening.**

#### Technical characteristics


Boomer: 6'' 1/2  
Power: 50 W  
Impedance: 100V  
Transformer: 15w/30w/50w  
Band passer-by: 90 Hz - 20 KHz  
Acoustic level: 99 +/-3dB @ 1W/1m  
Maximal level: 105 dB +/-20%  
IP: IP65  
Dimensions : 362 (L) x 310 (P) x 252 (H) mm  
Humidity Resistance: 95%  
Temperature Max: +70°C  
Temperature Min: -25°C  
Finishing: white  
Weight: 3.9 Kg  
Material: ABS

Delivered with an autocarrying cable of 2 meters

#### ATAO France

41, rue de la barre - BP 152 - 59027 Lille Cedex - France  
Tél : +33 (0)3 20 74 65 55 - Fax : +33 (0)3 20 74 65 50  
E-mail : contact@ataoaudiosystem.com

Frequency Response between 150 Hz and 20 KHz

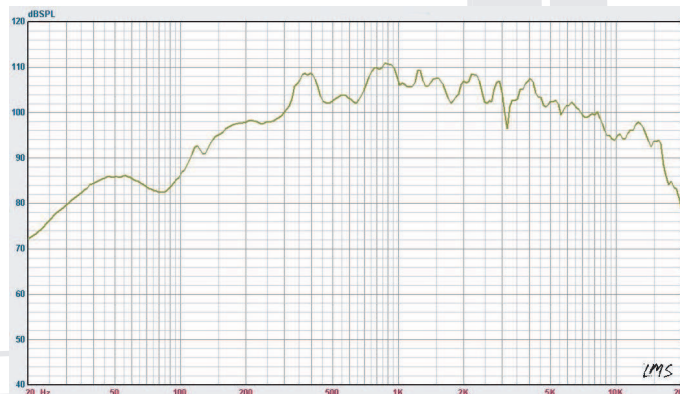

Dimensions

